

DEKAI 德凯



应用行业：汽车座椅、汽车内饰、软体家具等

Application Industries: Automotive Seats,
Automotive Interiors, Soft Furniture, etc

DK-2719


单针柱式三同步缝纫机

Single-Needle Column-Type
Three-Synchronous Sewing Machine



应用工艺：平面或3D立体单线装饰明线

Application Process: Flat or 3D Single-Needle Decorative Topstitching

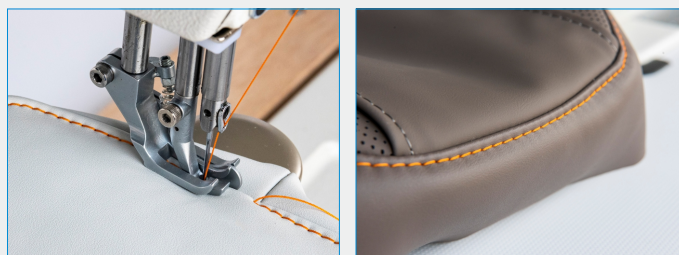



纤细的立柱式底座，比平板机器更易处理半径较窄的立体压明线工序。

A slender column-type base makes it easier to handle narrow-radius 3D topstitching compared to flatbed machines.



压脚、底牙、机针三同步送料，保证送料精准稳定。


Three-synchronous feeding by the presser foot, feed dog, and needle ensures accurate and stable material feeding.

配备自动抬压脚与自动倒针功能

Equipped with automatic presser foot lifting and automatic reverse stitching functions

选配：底贴带装置

Optional: Bottom tape applicator.

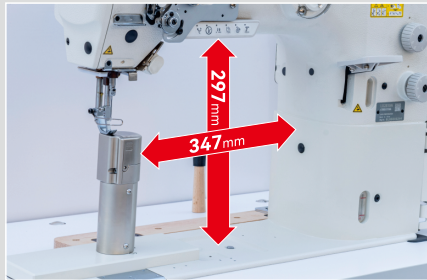

超大的臂下空间更容易处理大件的产品。

The extra-large arm space facilitates the handling of larger products.



快速转换压脚交替行程功能，接缝处材料变厚瞬间改变压脚行程，轻松过厚。

Quick-switch alternating presser foot stroke function allows for instant adjustment of the presser foot stroke when encountering thicker materials at seams, making it easy to sew through thick sections.

DK-2719-R为右边旋梭（右柱）

DK-2719-L为左边旋梭（左柱）


DK-2719-R has a right-side hook mechanism (right column)

DK-2719-L has a left-side hook mechanism (left column)



2个针码长短控制功能。

Two needle length control functions.

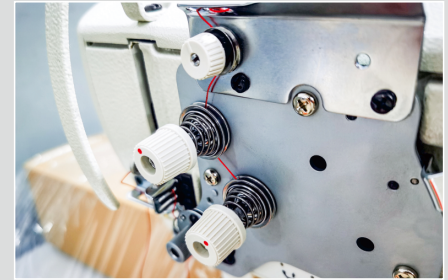

额外附加线张力功能，接缝处材料变厚额外给面线增加张力，底线不起珠。

Additional thread tension adjustment function provides extra tension on the top thread when sewing thicker materials at seams, preventing bobbin thread from showing.

标配坐式专用机架(带万向轮)，可选配站立式专用机架(带万向轮)或者站立式电动机架

Standard equipped with a seated dedicated stand (with casters), optional configurations include a standing dedicated stand (with casters) or an electric standing stand

产品规格 Product Specifications

型号	Model	DK-2719
最高缝速	Max Sewing Speed	2500 针/分钟 (needle/minute)
最长针码	Max. stitch length	9mm
旋梭直径	Hook diameter	26mm
压脚抬高高度	Presser foot lift clearance	20mm
自动提升装置	Automatic lifting device	气动式 Pneumatic type
交替压脚行程	Alternating foot stroke	1-9mm
臂下空间	Arm operating space	347mm×297mm
机针型号	Needle System	134-35
最大机针	Needle Size	180 (24#)
最大缝线	Thread	Tex 270 (10#)
供油方式	Lubrication	自动 Automatic
机头重量	Machine head weight	约72KG
气压和耗气量	Air pressure	6bar, 0.7NL/min.
电源要求	Power supply	230V, 50/60Hz

**“sti/min”代表“针/分钟”

