

DEKAI 德凯



应用行业：汽车座椅、汽车内饰

Application Industries: Automotive seats,
automotive interiors.

DK-856


柱式三同步双链式缝纫机

Needle Column Three Synchronous
Double Chain Sewing Machine




应用工艺：汽车仪表台、门板、扶手等3D立体装饰
明线缝纫

Application Process: 3D decorative stitching with visible thread on car
dashboard, door panels, armrests, etc.

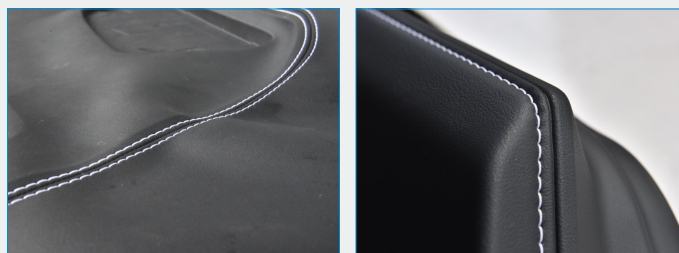



超小缝纫底座，轻松缝纫窄小物件的立体转角。
Ultra small sewing base, capable of easily sewing narrower three-dimensional corners.

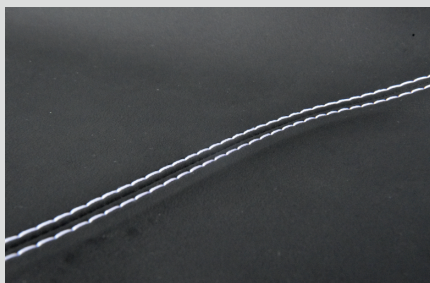


完美双链式线，线迹更立体，针孔更小。
Perfect double chain line, with more three-dimensional traces and smaller pinholes.



三同步送料系统，送料稳定精准。
Triple synchronous feeding system ensures stable and precise feeding.



电动升降机架，能精准调节最符合操作的高度。
The electric lifting frame can accurately adjust the height that is most suitable for operation.

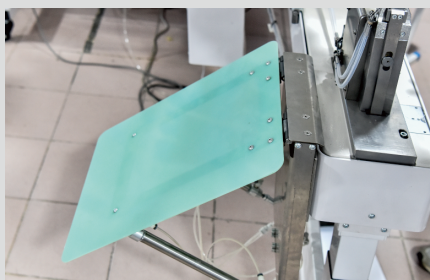

可选配气动辅助架，轻松应对大件材料的缝纫。
Optional pneumatic auxiliary frame, easy to handle sewing of large materials.



有单针机型和双针机型可选择。
There are single needle and double needle models to choose from.

DK-856-1 单针机型
DK-856-2 双针机型
DK-856-1 single needle model
DK-856-2 dual needle model

产品规格 Product Specifications

型号	Model	DK-856-1/DK-856-2
双针针距选择	Twin needle distance	6/8/10mm
最高缝速	Max Sewing Speed	2000 针/分钟 (needle/minute)
最长针码	Max. stitch length	6mm
压脚抬升高度	Presser foot lift clearance	16mm
自动提升装置	Automatic lifting device	气动式 Pneumatic type
交替压脚行程	Alternating foot stroke	1-6.5mm
臂下空间	Arm operating space	335×375mm
机针	Needle	32:25 22#-23#
缝线	Thread	20#
供油方式	Lubrication	自动 Automatic
机台尺寸	Machine size	1240×700×1580 mm (长×宽×高)
电动机架升降高度	Electric lifting height	1000-1200mm
机器重量	Machine weight	约110kg
气压和耗气量	Air pressure	6bar,0.7NL/min.
电源要求	Power supply	230V,50/60Hz

*“sti/min”代表“针/分钟”

