


JUKI

超小缝台、超长臂空间、完美双链线迹
轻松应对各种表皮材质的汽车仪表台及门板3D缝纫

Ultra small sewing table, ultra long arm space, perfect double chain stitching to easily handle 3D sewing of various surface materials for automotive instrument panels and door panels

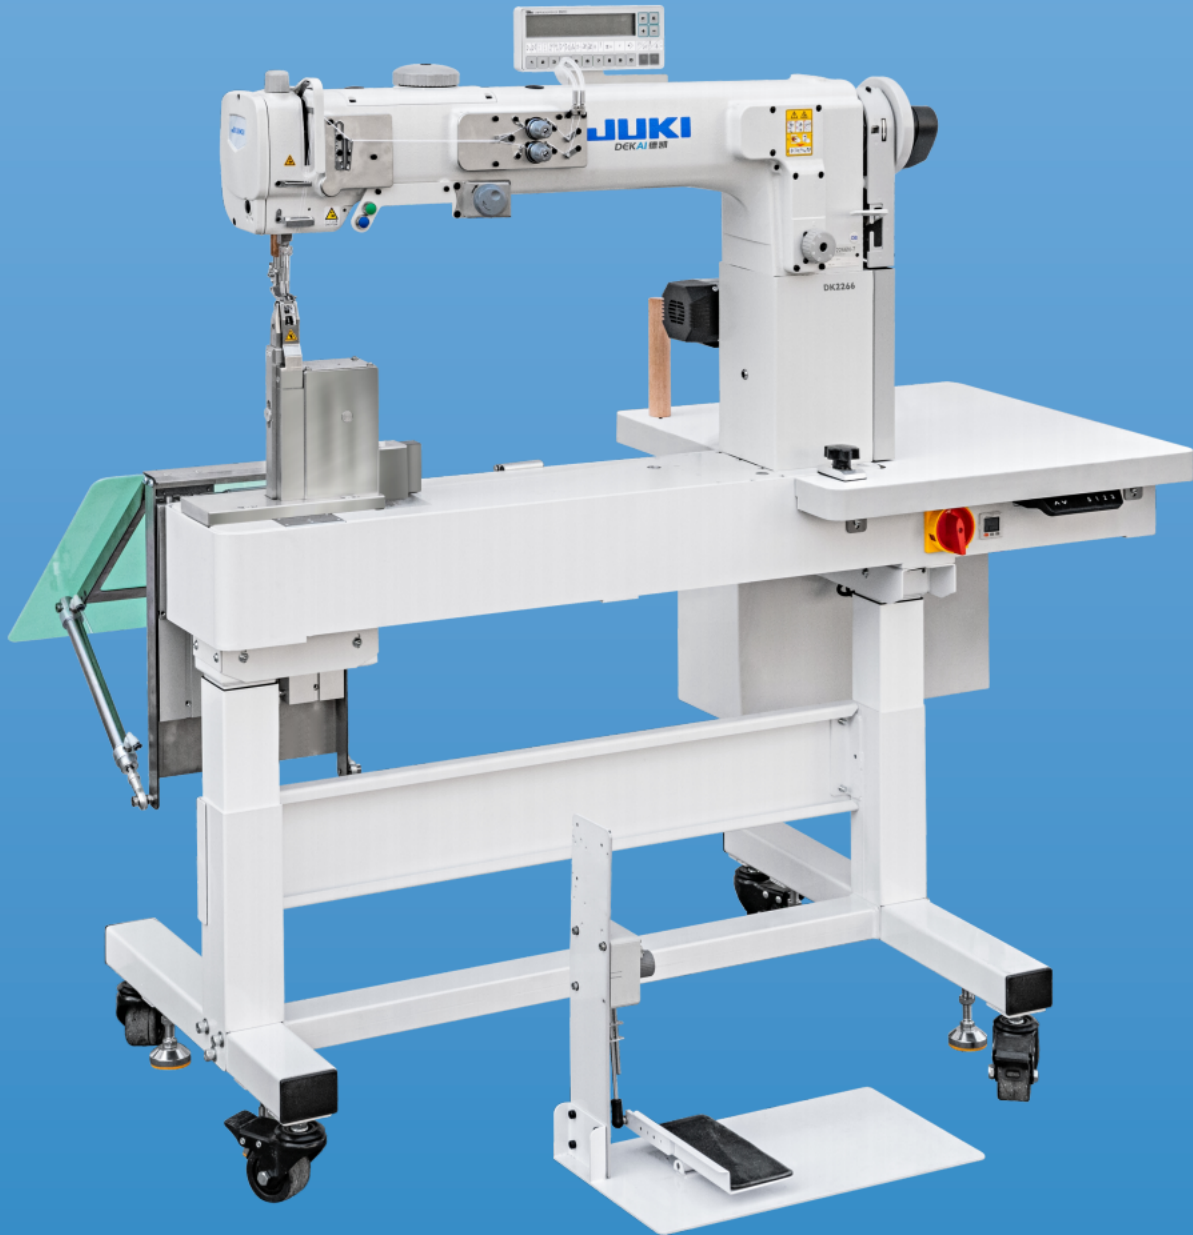

LU-2266-EFKA

(双链线双针 Double chain thread and double needle)

LU-2216-EFKA

(双链线单针 Single Chain Thread And Double Needle)

长臂综合送双链线柱式缝纫机

LONG ARM COMPREHENSIVE DOUBLE CHAIN THREAD COLUMN SEWING MACHINE

将缝制空间扩大到了650mm
适用于汽车内饰件的表皮装饰线缝纫

Expanded the sewing space to 650mm
Suitable for sewing decorative threads
on the surface of automotive interior parts

机臂与机针之间空间大
Longer distance from machine arm to needle

机臂到机针中心的距离长达650mm，最适合嵌条缝的加固缝工序，以及大型面料明线缝等的中间缝制工序。

With the long distance from the machine arm to the center of the needle, a full 650mm, the machine is ideally suited to reinforcement stitching processes for attaching tape and intermediate sewing processes such as topstitching for large workpieces.

全自动供油
Fully automatic fuel supply

采用全自动供油，省去手动加油的繁琐作业。机油通过柱塞泵强制循环流经机器面板。从而防止面板漏油。

Adopting fully automatic fuel supply eliminates the tedious task of manual refueling. The engine oil is forced to circulate through the machine panel by a plug pump. So as to prevent panel oil leakage.

更高生产率
Higher productivity

最高缝制速度均为2000rpm，确保缝制长面料时的高生产率。

The maximum sewing speed is 2000rpm. Ensure high productivity when sewing long fabrics.

压脚提升量达16mm The presser foot lift is as high as 16mm

压脚可提升至16mm，足够的提升量确保厚料缝制设置简便，操作舒适。

The presser foot goes up as high as 16mm. This ample lift ensures easy setting of heavy materials on the machine and comfortable operation.

可轻松设定和变更同步压脚和压脚的上下行程
The vertical stroke of the walking foot and presser foot can be easily set and changed


通过机头顶部的大拨盘，可以简便地更改同步压脚和压脚的上下行程(交替上下移动量)。缝制速度可根据上下行程设定进行自动调节。始终保持理想的条件。

The vertical stroke of the presser foot and walking foot (amount of alternating vertical movement) can be easily changed with the large dial mounted on the top of the machine head. The sewing speed is automatically regulated based on the vertical stroke setting. This ensures ideal sewing conditions at all times.

3D立体缝纫的超强通过性
Super passability of 3D stereoscopic sewing



完美双针线迹
Perfect double needle and thread stitch

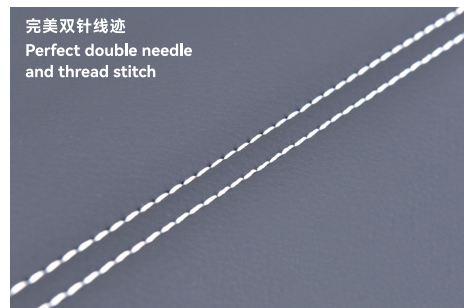

产品型号	Model	LU-2216-EFKA	LU-2266-EFKA
针数	Number of stitches	单针 Single needle	双针 Double needle
最大缝制速度	Max. Sewing speed	2000 needle/minute	
最大针距长度	Max. Stitch length	6mm	
针杆行程	Needle bar stroke	41mm	
双针针位选择	Double needle position selection	/	6/8/10mm
压脚提升量	Presser foot	手动: 9mm, 自动: 16mm Auto: 16mm, By hand: 9mm	
自动提升装置	Automatic lifting device	标准配置(气动式自动提升装置: AK142) Standard configuration (Pneumatic automatic lifting device: Ak142)	
挑线杆	Take-up lever	连杆式 Link type	
交替上下移动	Alternating up and down movement	1-6.5mm	
机臂操作空间	Arm operating space	650x250mm	
勾针	Crochet	●	
机针(出厂时)	Needle	32:25 22#-23#	
线	Thread	#20	
安全装置	Safety device	标准配置 Provide as standard	
供油方式	Lubrication	自动 Automatic	
供油	oil supply	JUKI新型1号Defrix Oil(等同于ISO VG7) JUKI New Type 1 Defrix Oil (Equivalent to ISO Vg7)	
从机针到机臂的距离	Hand controls	650mm	
机台尺寸	Machine size	1400x850mm	
机架电动升降高度	Electric lifting height	1000-1200mm	
机器重量	Weight	约160kg	
气压和耗气量	Air pressure	6bar 0.7NL/min.	
电源要求	Power requirements	230V 50/60Hz	

※规格及外观经过改良可能会与图片所示略有不同。 The specifications and appearance may be slightly different from those shown in the picture after improvement.

